


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B01J 8/20, 20/10, 20/28 B01J 20/32, B01D 15/02		A1	(11) International Publication Number: WO 92/18237 (43) International Publication Date: 29 October 1992 (29.10.92)
(21) International Application Number: PCT/SE92/00255 (22) International Filing Date: 16 April 1992 (16.04.92)		(74) Agents: SVANSTRÖM, Pär et al.; Kabi Pharmacia AB, S-751 82 Uppsala (SE).	
(30) Priority data: 9101149-4 17 April 1991 (17.04.91) SE		(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent), US.	
(71) Applicant (for all designated States except US): PHARMACIA LKB BIOTECHNOLOGY AB [SE/SE]; S-751 82 Uppsala (SE).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(72) Inventors; and (75) Inventors/Applicants (for US only) : CARLSSON, Mats [SE/SE]; Söderby, Akerby, S-740 22 Bällinge (SE). GUSTAFSSON, Jan-Gunnar [SE/SE]; Rådjurssågen 6, S-756 53 Uppsala (SE). HEDMAN, Per [SE/SE]; Runbyvägen 48, S-194 40 Upplands Väsby (SE). PERNE-MALM, Per-Åke [SE/SE]; Björkhagsvägen 11 D, S-756 46 Uppsala (SE). LÖNNGRÉN, Jörgen [SE/SE]; Ormvårkavägen 16, S-756 52 Uppsala (SE). LINDGRÉN, Annika [SE/SE]; Hollandsresan 155, S-757 55 Uppsala (SE).			

(54) Title: PROCESS AND MEANS FOR DOWN STREAM PROCESSING

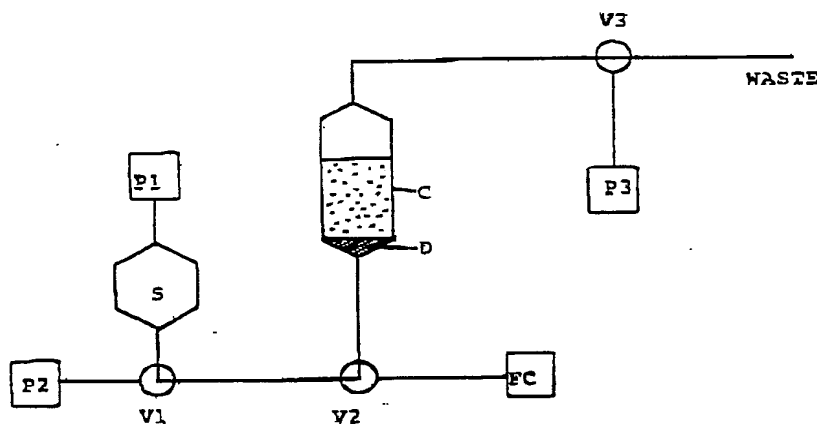

(57) Abstract

Supports beads for down stream processing comprising a polymer, esp. a polysaccharide, matrix into which glass or silica particles, preferably quartz particles, have been incorporated, and their use in downstream processing, especially stabilized fluidized bed separations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
DE	Germany	MC	Monaco	TG	Togo
DK	Denmark			US	United States of America

WO 92/18237

PCT/SE92/00255

1

Process and means for down stream processing.

The present invention is related to the field of separations in fluidized beds and to beads of a polymer, especially a polysaccharide, into which glass or silica particles, especially quartz particles have been incorporated, and the use of these beads as carrier matrices in stabilized fluidized bed systems, which are characterized by having a low extent of axial dispersion.

It is known that solid entities may be kept suspended above a solid support by bringing the solid entities into a fluid medium (gas or liquid) which is flowing in opposite direction relative to the gravitational field. A number of particles placed in such a stream of flowing medium in a confined space, such as a cylindrical vessel (column), is commonly referred to as a fluidized bed provided that the particles stay resident in the confined space. This is achieved by balancing the gravitational force versus the frictional, lifting force, exerted by the fluid stream on the solid particles.

Fluidized beds have been used as an efficient means of bringing solid particles in contact with a fluid phase. The relatively high fluid velocities, relative to the particles, allow for efficient mass and heat transfer. Consequently, fluidized beds have been used for combustion and for adsorption processes. Fluidized beds have also been used for culturing of microbial plant or animal cells in so called air-lift reactors. In this case nutrients and dissolved oxygen are brought to the cells and waste products are removed from the cells efficiently because of the efficient mass transfer.

Minor irregularities in the flow field in a fluidized bed cause translational movements of the particles. Over a certain time, there is the same probability that a certain particle may be found at any position within the confined space of the fluidized bed. Here, this effect is referred to as back-mixing or a large degree of axial dispersion. The back-mixing is advantageous when it is desirable to achieve a homogeneous

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

2

composition of the fluid and solid phases in the entire fluidized bed. However, for adsorption processes, a homogeneous composition is not necessarily advantageous.

In fact, it is possible to obtain a lower concentration of a solute in the effluent fluid if there is no back-mixing than there is with back-mixing in the confined space of the fluidized bed.

In order to prevent complete back-mixing, it has been shown (Buijs (1980)) that screens inserted into the fluidized bed result in a compartmentalization of the bed.

The density, viscosity and the velocity of the fluidium and the diameter and density of the solid entities affect the balancing of frictional versus gravitational forces (Lydersen (1979)). Much lower fluid velocities must be used with liquids than with gases because of the higher densities and viscosities of liquids. In order to reduce mass transfer resistances and to increase through-put (the liquid feed-rate) one may wish to use higher flow rates than those which may be balanced by the gravitational field only. This is possible by applying a third force onto the solid entities. The latter force may be induced by a magnetic field applied to a bed containing ferro- or paramagnetic particles. Such magnetically stabilized fluidized beds have been described (see for instance Burns (1985:1 and 1985:2)). The heat generated by such a system for stabilizing the bed is a clear disadvantage and makes the method less useful especially in temperature sensitive biomolecular systems, even if various cooling systems are available. The need for equipments for generating a magnetic field and for cooling the system increases the process costs considerably.

Particles with relatively lower density and diameter move upwards in the fluidized bed. Consequently, it is possible to feed an unclarified liquid into a fluidized bed containing large diameter and/or high density adsorbent particles without accumulation of solids from the feed in the fluidized bed. The relatively smaller and/or less dense particles originating from the feed stream will be washed out with the effluent

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

3

provided that the liquid flow-rate is chosen properly. Thus it is possible to improve an adsorptive recovery process starting with an unclarified feed by using a fluidized bed since time, costs and yield reduction caused by a clarification step are avoided. However, since a fluidized bed is back-mixed (unless it is stabilized in some way) the bed is a less efficient adsorber than a packed bed due to the larger axial dispersion in the former. A second reason why the packed bed is more efficient as an adsorber is that the packed bed acts as a multi-step adsorber.

A single step adsorber, such as a fluidized bed, may, on theoretical grounds, be expected to work efficiently if the adsorbing sites have a high binding affinity for a solute, relative to the concentration of the solute in the feed stream. The systems described so far for carrying out separations in a fluidized bed, however, do not fulfil all the demands raised by the users. One problem so far has been that since the beds are not stabilized, flow channels through the bed are easily created, in which the sample molecule might pass with only little chance to be bound.

The beads should be relatively small to allow short diffusion distances, have high density, controlled high sedimentation velocity, being an easily derivatized hydrophilic polymer suitable for applications involving biomolecules.

We have now unexpectedly found that beds may be designed, which combine the advantageous properties of packed beds and fluidized beds. In one aspect of the invention beds are provided which allow relatively less dense and/or relatively smaller particles to pass through the bed with the upward flowing liquid stream since the particles are not packed close together.

By using bead particles covering a given size and/or density interval the particles are kept from moving around in the confined space of the bed such that, for a certain particle the probability to find it in a certain position is high only in a limited volume being a minute fraction of the

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

4

total bed volume. By keeping the particles resident locally, back-mixing is prevented, thereby reducing axial dispersion and allowing for multistep adsorption without insertion of screens or similar devices.

Furthermore, the beads of the invention are kept suspended in upward flowing liquids without the need for application of heat generating magnetic fields or use of ferro- or paramagnetic additives to the adsorbent particles. In the following the beds achieved when using the actual particles are referred to as stabilized or unmixed expanded beds, which are characterized by having negligible axial dispersion. The axial dispersion is often expressed by the vessel dispersion number (for a definition see Levenspiel (1972)) which in a stabilized bed should be less than about 75×10^{-3} , and especially less than 20×10^{-3} .

The beads according to the invention comprises a polymer matrix into which glass or silica particles, preferably quartz particles are incorporated. The beads may be porous as well as non-porous. The diameter is 100 - 1000 μm , preferably 100 - 500 μm , and spherical beads as well beads of an irregular shape may be used, even if spherical beads are preferred as discussed below. The density of the beads is typically 1.10 - 1.50 g/ml, for instance around 1.15 g/ml (the values are given for hydrated beads).

The polymer is synthetic, for instance from mono- or polyvinyl monomers like acrylates, metacrylates or vinylbenzenes, or of natural origin, preferably a polysaccharide, for instance agarose, starch, cellulose or derivatives of these, optionally crosslinked for the desired rigidity and pore distribution.

The glass or silica particles to be incorporated are preferably in the range of from 1 - 100 μm and may be spherical as well as of an irregular shape. The amount of silica particles incorporated into the polymer particles is in the range of from 5 - 50 % of the weight of the wet final particle. In a preferred embodiment of the invention quartz particles are utilized.

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

5

One important characteristic of a carrier matrix to be used in down stream processing is that it is stable to the various solutions used for instance in reconditioning steps. Several applications require a strongly alkaline medium to be used for reconditioning and this has been found to be fatal to the prior art carrier matrices earlier tested. Especially in cases when the flow through the bed during the elution step is reversed to give a packed bed, even minor changes of the support matrix might cause serious problems resulting in lower yields, etc. In this elution technique spherical beads are preferred for improved elution capability. The reasons for this are well known to those skilled in the art.

In this aspect of the invention the beads are used in a separation system of the type schematically shown in Fig 1, especially adopted for recovery of products from a culture medium, including for instance cell wall particles and other waste products after lysis of the bacteria or other hosts that have been used.

The major components of the system are: pumps P1-P3 (supplying the appropriate solutions), valves V1-V3, sample container S, column C, containing a flow distributor D at the bottom and an adjustable upper adapter (not shown), and a fraction collector FC.

Fig 1a shows the system in the fluidized bed mode during which the desired component is bound to the gel and separated from other components. A solution is pumped by P2 into the column, containing the beads, which have been derivatized to bind the component to be purified, for creating a stabilized fluidized bed and for creating appropriate conditions with regard to pH, ionic strength, etc. The outflow from the column is connected to waste. The valve V1 is next switched so that the sample solution is pumped by P1 into the column, under conditions so that a stabilized fluidized bed is maintained. When the sample has been transferred to the column, valve V1 is switched so that a washing solution (via P2) is fed into the column. After the fluidized bed has been thoroughly washed, and unbound components like cell particles etc have

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

6

been eluted to waste through the top of the column, the first phase of the procedure is finished.

In Fig 1b the flow through the column is reversed for elution of the bound sample components. The valves have been switched so that the flow is from P3 via the column to the fraction collector FC. After the bed has been allowed to settle, and optionally further converted to a packed bed by moving the upper adapter down to the bed surface, a suitable elution solution is via P3 introduced into the bed whereby the desired component is released and collected. The upper adapter, which is of the traditional type found in a great number of columns for chromatography, is adjustable to a desired position in the column and contains a net to prevent beads to pass.

In an alternative embodiment of the invention elution of the column is carried out in the fluidized mode by introducing the elution solution via pump P2 into the column and collecting the sample constituents released from the beads with a fraction collector connected to the upper outlet of the column (replacing waste in Fig 1a). In this case there is no need for a movable upper adapter in the column.

Of crucial importance for obtaining the stabilized beds of the invention is the way the solution is introduced into the column. The solution must be equally distributed over the cross sectional area of the column and in order to achieve this a distributor is utilized. The distributor could typically be a perforated plate on the upper side (the gel bed side). It need not to be mentioned that the holes in the plate must be great enough to allow all sample constituents to pass or otherwise clogging would disturb the procedure. The pressure drop over D must for each combination of flow velocity, viscosity, particle size etc, exceed a given value since otherwise flow channels with low flow resistance and accordingly high flow are created in the bed. The ratio between the pressure drop over the distributor and the bed should therefore exceed 3 % and preferably 10 %, with much higher values, such as up to 50 %, 500 % and even 2000 % being

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

7

typical in an optimized system. The total cross sectional area of the holes is typically about 0.005 to 10 %, especially 0.005 to 3 %, of the total area of the plate.

If a conical distributor is used the need for a certain pressure drop in the distributor is less pronounced for obvious geometrical reasons and values below those indicated above are accessible.

The dimensions of a column to be used in a process according to the invention cover a broad range of values, for instance a diameter from 1 cm up to 1-2 meters and a length of about 10 cm to 10 meter, depending on the type of separation to be carried out and on what scale it is to be done. An important finding is that considerably shorter columns can be used in the stabilized fluid bed process compared to the non-stabilized prior art systems. The process is accessible for flow velocities around at least 50-3000 cm/h, even if values of about 100-500 cm/h are most frequently used. During elution the flow is normally 5-500 cm/h, and in particular 50-200 cm/h.

The method can as mentioned above be used in systems containing also solid particles like precipitates and cell wall constituents from cell culture media. In traditional chromatographic systems this type of impurities requires one or more prepurification step. This is accordingly one of the major advantages of the claimed method in that bacteria or yeast homogenates as well as blood, urine etc from humans or animals can be introduced directly into the column.

It has been found that in systems containing considerable amounts of particulate impurities clogging might occur in the upper adapter. This can easily be avoided if the flow through the column is occasionally reversed during the adsorption phase. An intermittent flow reversal of about 10-20 seconds every 15th minute has been found to eliminate the problem.

In a typical example a culture medium with a pH value of about 7 and containing immunoglobulins is fed as illustrated in Fig. 1a to a column containing beads derivatized with protein A which will bind IgG. Waste components, including

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

8

particles, are washed away with a neutral buffer, the flow is reversed and when the packed bed has been formed, the pH of the elution buffer is decreased to about 3 and IgG is eluted through the bottom of the column, in the mode illustrated in Fig 1b.

The invention is accordingly in one aspect related to support beads for use in down stream processing, such as fluidized bed separations, comprising a polymer matrix, into which silica particles have been incorporated. The polymer is preferably a polysaccharide, for instance agarose, starch, cellulose or derivatives of these, optionally crosslinked for the desired rigidity and pore distribution. The beads are in the range of from 100-1000 μm , preferably 100-500 μm and with glass or silica incorporated into the polymer particle in the range of 5 to 50 % of the weight of the wet final particle. The silica material used is for instance quartz, the latter being preferred at the moment. The invention is further related to the use of such beads in an expanded fluid bed system for separating various components from a liquid containing the desired component.

When preparing the agarose base matrix material which is the at present preferred bead matrix, an agarose solution containing the quartz particles is emulgated in the presence of a thickening additive, as further exemplified below.

The emulsifying agent should be a low molecular weight surface active compound and could be ionic or nonionic, for instance Span 20, Gafen LB-400 or another agent known in this art.

The thickening agent should be soluble in the dispersion medium and could be selected among hydrophobic polysaccharide derivatives. The preferred agent at the moment is ethyl cellulose.

In order to further stabilize the beads the polymer chains in the beads may preferably be crosslinked in a manner known per se. In case a polysaccharide like agarose is used the beads could for instance be suspended in a solution containing a crosslinking agent like a bisepoxide or a halohydrin under

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

9

conditions to give crosslinking of adjacent chains in the agarose matrix (Porath (1971)).

Agarose beads, as well as crosslinked agarose beads, have been used in a great number of chromatographic applications and there is an extensive literature describing various methods for derivatizing the beads for use in ion exchange chromatography, affinity chromatography, etc. These methods are obvious choices for preparing supports for specific applications. One such example is binding of protein A or protein G to the agarose matrix by the cyanogen bromide method for preparing a support for purification of IgG.

The invention is in another aspect related to a method for separating sample components by the use of a stabilized fluidized bed.

The method comprises the steps of

- loading a column for fluidized liquid bed processes with bead particles derivatized to bind a desired component,
- conditioning the particles with a solution under conditions so that a stabilized fluidized bed is created,
- feeding the so stabilized fluidized bed with a sample solution containing the desired component through a bottom port of the column, whereby the desired component is bound to the beads and impurities of the sample solution are discharged through the top port of the column,
- washing the column with a solution introduced through said bottom port under flow conditions maintaining the expanded bed, whereby remaining unbound components of the sample solution are discharged through the top port of the column,
- introducing an elution solution into the column for releasing the bound sample constituents from the beads and collecting them, optionally by using a fraction collector.

In one embodiment of the invention the elution step is carried out by introducing the elution solution through the bottom port of the column and maintaining the bed in an expanded bed mode.

In another embodiment the gel bed is packed by applying an inlet flow of an appropriate conditioning buffer through the

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

10

upper port of the column, and by moving down an upper adapter to the gel surface. This buffer should of course not be allowed to release the desired component from the beads. The elution solution is then introduced through the upper port of the column, the sample constituents are released from the beads and finally collected in the outflow from the bottom port of the column.

The advantages of using this method are readily appreciated in cases when one or more components from cell culture experiments are to be separated from other constituents of the medium. Solid cell particles, which would cause clogging of a packed bed can easily be removed from the system during the fluidized bed phase of the procedure and will not at all interfere.

The invention will now be illustrated by a series of examples.

Example 1. Synthesis of crosslinked agarose beads containing quartz particles 10g/100ml, 6% agarose
Bead formation.

An agarose solution was prepared by stirring 57 g of agarose in 900 ml water at 90°C, until the agarose was dissolved and the viscosity of the solution was in the range of 250-700 cPs at 85°C.

To the stirred agarose solution 90 g of quartz particles (10-70µm, NGQ 200, Ernströms, Sweden) was added. The slurry was poured into a solution of 45 g ethyl cellulose (N-50, Hercules, USA) in 1000 ml of toluene, at 60°C, in a cylindrical vessel equipped with a stirrer at 100-200 rpm. Approximately 20 ml of Gafen LB 400 (Gaf, USA) in toluene (1:2, w/v) was gradually added to give the desired bead size. The stirred suspension was cooled to room temperature and 1000 ml water was added. The mixture was left over night and the upper liquid phase was removed. The beads were washed with toluene, with water and finally wet sieved to yield a size distribution of 125-315 µm.

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

11

Crosslinking.

Crosslinking with epichlorohydrin was essentially performed as described by Porath et al (1971).

Example 2. Synthesis of agarose beads containing quartz particles. 13g/100ml, 4% agarose

To a stirred agarose solution, prepared as in Example 1 but with 12 g of agarose in 300 ml water, 40 g quartz (10-70µm, NGQ 200, Ernströms, Sweden) was added. The slurry was suspended in a stirred solution of 25 g ethyl cellulose (N-50, Hercules, USA) in 350 ml toluene, at 60°C. After one hour the suspension was allowed to reach room temperature. The quartz containing agarose beads were washed, wet sieved and crosslinked as above.

Example 3. Synthesis of agarose beads containing quartz particles. 17g/100ml, 6% agarose

A slurry of quartz in agarose solution was prepared as in Example 2, but with 28 g agarose in 450 ml water and with 75 g quartz. The suspension was suspended in a solution of 500 ml toluene and 50 g ethyl cellulose and stirred for 3 hours at 60°C. After cooling to room temperature, the beads were washed, wet sieved and crosslinked as above.

Example 4. Synthesis of agarose beads containing quartz particles. 33g/100ml, 6% agarose

Prepared as in Example 3 but with 150 g quartz particles.

Example 5. Synthesis of crosslinked dextran beads containing quartz particles.

To a stirred solution of 16 g dextran (Mw 250 000), 3,5 g sodium boro hydride and 1,6 g sodium hydroxide in 40 ml water, 3 g quartz particles (10-45µm, NGQ 325, Ernströms, Sweden) were added. The slurry was added to a stirred solution of 3 g Gafen LB 400 and 3 g ethyl hydroxyethyl cellulose (EHEC-XH, Hercules) in 75 ml toluene in a round bottom flask equipped with a blade stirrer at 500 rpm. The stirred suspension was

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

12

heated to 50°C and 8 ml epichlorohydrin was added. The suspension was kept at 50°C over night. The quartz containing beads were then washed with ethanol and finally with slightly acidic water and wet sieved as above.

Example 6. Synthesis of porous divinyl benzene beads, containing quartz particles

Silanization of quartz particles:

A slurry of 40 g quartz particles (10-70µm, NGQ 200, Ernströms, Sweden) in 200ml, 1 M sodium hydroxide was heated at 90°C for 3 hours. The cooled slurry was filtered and the quartz was washed with water and dried. The quartz particles were transferred to 140 ml toluene and 6,25 g imidazol was added. The stirred slurry was heated to 100°C and 16,6 g dimethyloctadecylchlorosilane was added. The slurry was maintained at 100°C over night and then cooled and filtered. The silanized quartz particles were washed with acetone, water and finally acetone and dried at room temperature.

Suspension polymerisation

A solution of 5 g polyvinyl alcohol (Mowiol 40-88, USA) in 100 ml water was mixed with a solution of 15 g dextran (Mw 40 000) in 150 ml water. To the stirred solution a slurry of 0,5 g benzoyl peroxide, 25 ml divinylbenzene, 25 ml 4-methyl-2-pentanol and 4 g silanized quartz was slowly added and kept at 75°C for 6 hours. The cooled suspension was filtered and the quartz containing divinyl benzene beads were washed with alcohol and finally with water.

Example 7. Sedimentation of agarose particles with and without quartz particles.

In this experiment various gels were loaded on a column suitable for fluidized bed experiments and the height of the gel bed was measured at various flow rates.

Gel 1: (125-280 µm) is an agarose gel synthesized as in Example 1 but without addition of quartz. It has further been

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

13

derivatized to contain sulphonate groups which however is of no importance in the actual experiments.

Gel 2: (122-250 μ m) is a quartz-containing agarose gel synthesized as in Example 1. The quartz contents was 17 g of quartz per 100 ml of agarose and it was further derivatized to contain diethylaminoethyl (DEAE) groups.

Gel 3: (125-280 μ m) is a gel containing 33 g of quartz per 100 ml of agarose and was synthesized as Gel 2.

Each gel was loaded on a column (50x600 mm) and the height of the bed was measured. A flow of 10ml/ml was applied and the height of the now expanded bed was measured after it had stabilized. The flow was increased in steps of 10 ml/min and the subsequent bed height was measured. The results showed that it was possible to apply considerably higher flow velocities using the beads of the invention and still working under stabilized fluidized bed conditions.

Example 8. Purification of a recombinant anticoagulant protein from an E. coli homogenate.

An E.coli strain expressing the anticoagulant protein annexin V was grown in a complex nutrient medium in a fermentor. After harvest the cells were pelleted, resuspended in water and passed three times through a high pressure homogenizer. Triton X-100 was added to 0.5 % final concentration and the pH was adjusted to 5.5 using acetic acid.

An expanded bed column (50 mm diameter, 60 cm high) was filled to 11.5 cm (225 ml) with quartz containing agarose beads, according to the present invention, which were charged with diethylaminoethyl (DEAE) groups. The gel bed was expanded to 30 cm at 300 cm/h linear flow rate in equilibration buffer; 30 mM ammonium acetate, pH 5.5. At the same flow rate, 1600 ml of the E. coli homogenate was applied. The gel bed was then washed with equilibration buffer and equilibration buffer containing 80 mM NaCl, at 400 cm/h. The flow rate was then decreased to 200 cm/h and the flow direction reversed in order to pack the gel. The upper adapter was moved down to the bed

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

14

surface and bound proteins were eluted with equilibration buffer containing 250 mM NaCl at 100 cm/h. According to anticoagulant activity assays 80 % of the applied annexin V was bound and eluted from the gel.

This purification was also successfully repeated in a pilot scale expanded bed column (200 mm diameter, 95 cm high) containing 3.1 liter gel. The sample volume was 8 liter.

Example 9. Characterization of the fluidized bed stability.

An expanded bed column (50 mm diameter, 60 cm high) containing a distributor with a hole area of about 3 % of the total area, was filled to 6.0 cm (118 ml) with quartz containing agarose beads with a particle distribution in the range of from 100 to 270 μm . The gel was expanded to 30 cm at 300 cm/h linear flow rate in distilled water. The pressure drop over the distributor was 66 % of the pressure drop in the bed.

A pulse input of 32 ml acetone solution with a concentration of 0.25 % was injected into the column as a tracer in a "stimulus response experiment" (see Levenspiel (1972)). The result expressed as the "vessel dispersion number" defined from the model "Dispersion model for small extents of dispersion" was 19×10^{-3} (for definitions see Levenspiel (1972))

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

15

References.

Buijs et al (1980) "Batch fluidized ion exchange column for streams containing suspended particles, Journal of Chromatography 201, page 319-327.

Lydersen (1979), Fluid Flow and Heat Transfer, John Wiley & Sons Ltd, Chichester, page 134-136.

Burns et al (1985:1) "Continuous Affinity Chromatography using a Magnetically Stabilized Fluidized Bed", Biotechnology Progress 1(2) page 95-103.

Burns et al (1985:2) "Dried Calcium Alginate/Magnetite Spheres: A New Support for Chromatographic Separations and Enzyme Immobilization" Biotechnology and Bioengineering 27, page 137-145.

Porath et al (1971) "Agar derivatives for chromatography, electrophoresis and gel bound enzymes. Desulphated and reduced crosslinked agar and agarose in spherical bead form", Journal of Chromatography 60, page 167-177.

Levenspiel (1972) "Chemical Reaction Engineering", Second Edition. John Wiley & Sons.

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

16

claims.

1. A method for recovering a desired component from a sample solution comprising the steps of

- (i) feeding the sample solution comprising the desired component to be recovered into a column containing beads having affinity for the component, through a bottom port equipped with a flow distributor, under stabilized fluidized bed conditions, whereby unbound components of the sample solution are discharged through the top port of the column
- (ii) washing the column with a solution introduced through said bottom port under flow conditions, maintaining an expanded bed, whereby remaining solid components and other impurities of the sample solution are discharged through the top port of the column,
- (iii) introducing an elution solution for releasing sample components bound to the beads and collecting said components.

2. A method according to claim 1, wherein step (iii) is carried out by allowing the beads to settle, optionally by applying an upper adapter onto the bead surface and introducing a solution through the top port of the column so that a packed bed is achieved and thereafter eluting the column by applying through the top port an elution medium in which the component is released from the beads.

3. A method according to any one of claims 1 and 2, characterized in that the beads forming the fluidized bed are chromatographic support beads according to any one of claims 5 - 10.

4. A method according to any one of claims 1 - 3, characterized in that the sample solution is a cell culture medium containing solid cell particles.

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

17

5. Support beads for use in downstream processing, characterized in that they comprises a polymer matrix into which glass or silica particles have been incorporated.

6. Support beads according to claim 5, characterized in that the polymer is an, optionally crosslinked, polysaccharide.

7. Support beads according to claim 6, characterized in that the polymer is agarose.

8. Support beads according to any one of claims 5 - 7 characterized by having a diameter of from 100 to 1000 μm and a silica or glass contents of 5 - 50 % (wet weight).

9. Support beads according to any of claims 5 - 8 characterized in that the glass or silica particles have a size distribution in the range of from 1 to 100 μm .

10. Support beads according to any one of claims 5 - 9 characterized in that the silica particles used are quartz particles.

SUBSTITUTE SHEET

WO 92/18237

PCT/SE92/00255

1/1

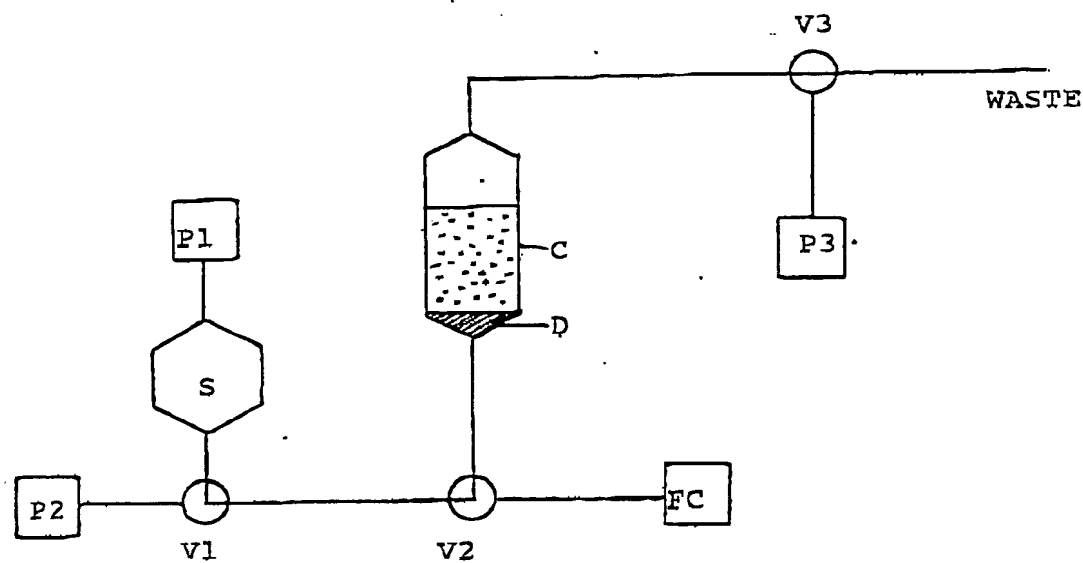


FIG. 1a

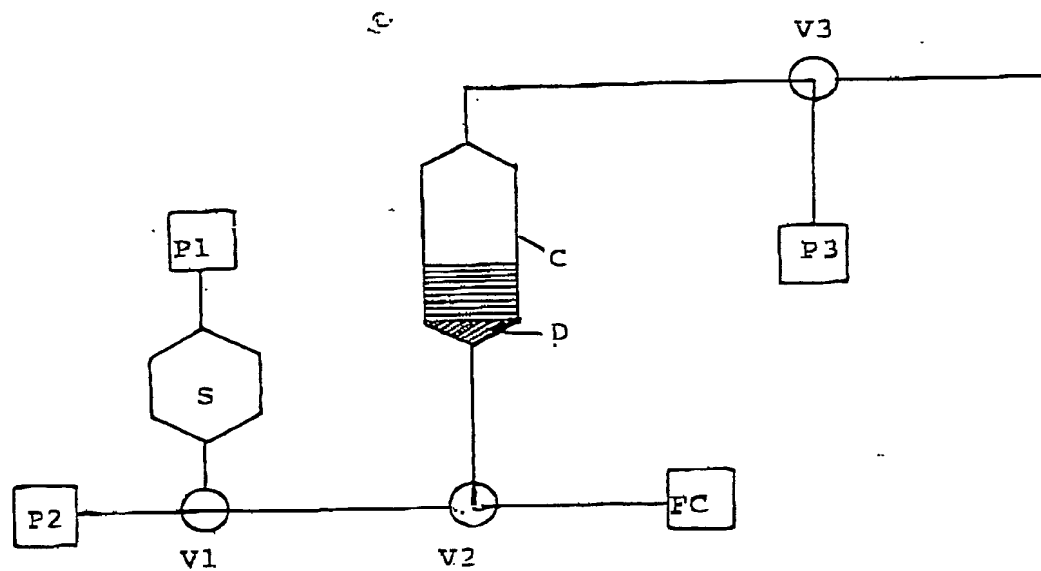


FIG. 1b

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International Application No PCT/SE 92/00255

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC5: B 01 J 8/20, 20/10, 20/28, 20/32, B 01 D 15/02		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC5	B 01 J; B 01 D; G 01 N	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in Fields Searched ⁸		
SE,DK,FI,NO classes as above		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category *	Citation of Document ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	SE, B, 409822 (PHONE-POULENC INDUSTRIES) 10 September 1979, see the whole document --	5
X	WO, A1, 8908500 (ROBINSON, ERIC) 21 September 1989, see page 2, line 7 - line 20 --	5-7
X	EP, A1, 0328256 (OWENS-CORNING FIBERGLAS CORPORATION) 16 August 1989, see claims 1-14 --	5-7
X	EP, A2, 0047617 (HOU, KENNETH C.) 17 March 1982, see page 27 - page 30 --	5
<p>* Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"Z" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
28th August 1992	1992 -09- 02	
International Searching Authority	Signature of Authorized Officer	
SWEDISH PATENT OFFICE	Eva Iversen Hasselrot	

International Application No. PCT/SE 92/00255

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No
A	SE, B, 444268 (INSTITUT MERIEUX) 7 April 1986, see the whole document ---	1-4
A	EP, A1, 0140572 (EXXON RESEARCH AND ENGINEERING COMPANY) 8 May 1985, see the whole document ---	1-4
A	EP, A2, 0047518 (UDP INC.) 17 March 1982, see the whole document -----	1-4

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO. PCT/SE 92/00255

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the Swedish Patent Office EDP file on 31/07/92. The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
SE-B- 409822	79-09-10	BE-A- 832872	76-03-01
		CA-A- 1079130	80-06-10
		CH-A- 606263	78-10-31
		DE-A- 2538353	76-03-18
		FR-A-B- 2283101	76-03-26
		GB-A- 1480668	77-07-20
		JP-A- 51052377	76-05-08
		LU-A- 73277	76-05-31
		NL-A- 7510161	76-03-02
		SE-A- 7509645	76-03-01
		US-A- 4112185	78-09-05
WO-A1- 8908500	89-09-21	NONE	
EP-A1- 0328256	89-08-16	JP-A- 2006750	90-01-10
EP-A2- 0047617	82-03-17	AU-B- 543079	85-03-28
		AU-D- 7534481	82-03-31
		CA-A- 1161767	84-02-07
		US-A- 4384957	83-05-24
		WO-A- 82/00774	82-03-18
		US-A- 4512897	85-04-23
SE-B- 444268	86-04-07	BE-A- 870565	79-03-19
		CH-A- 642862	84-05-15
		DE-A-C- 2840503	79-03-29
		FR-A-B- 2403098	79-04-13
		GB-A-B- 2006642	79-05-10
		JP-C- 1205319	84-05-11
		JP-A- 54063894	79-05-23
		JP-B- 58039576	83-08-31
		NL-A- 7809486	79-03-21
		SE-A- 7809789	79-03-20
		US-A- 4308254	81-12-29
EP-A1- 0140572	85-05-08	AU-B- 569205	88-01-21
		AU-D- 3368284	85-04-04
		CA-A- 1239879	88-08-02
		JP-A- 60094107	85-05-27
		US-A- 4655796	87-04-07
EP-A2- 0047518	82-03-17	JP-C- 1250482	85-02-14
		JP-A- 57083300	82-05-25
		JP-B- 59023799	84-06-05

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. PCT/SE 92/00255**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the Swedish Patent Office EDP file on 31/07/92
The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0047518	82-03-17	US-A- 4333770	82-06-08